



Classic Garage




Description

- Series: EGF-EC
- Lamp Life Rating: 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP43
- Applications: Parking garages, gas stations, schools, shopping malls
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Bi-Level Ballast option dims to 40% power for additional energy savings
- Die cast aluminum housing with bronze powder coat finish for corrosion-resistance
- UV stabilized, heat resistant polycarbonate lens
- Lightweight and compact structure for easy maintenance
- Electronic ballast with high power factor
- Excellent vibration & shock resistance
- Isolated ballast compartment

Ordering Information

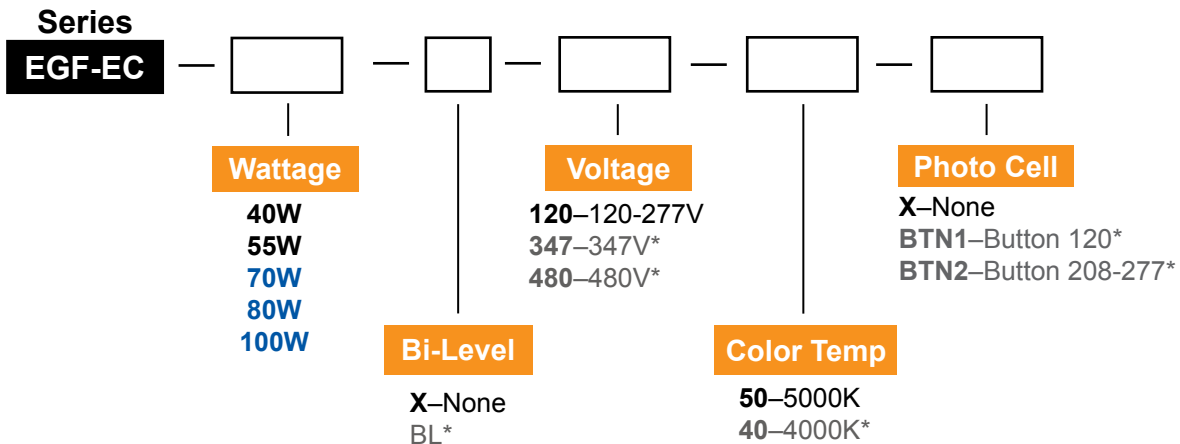

Bold = Standard

Grey * = Upgrade options available upon request

Blue = Bi-Level Wattage Options

Example: **EGF-EC-70-BL-120-50-X**

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.


Call Toll Free: 888-383-7578

www.everlastlight.com


© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203. Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.



Dimensions

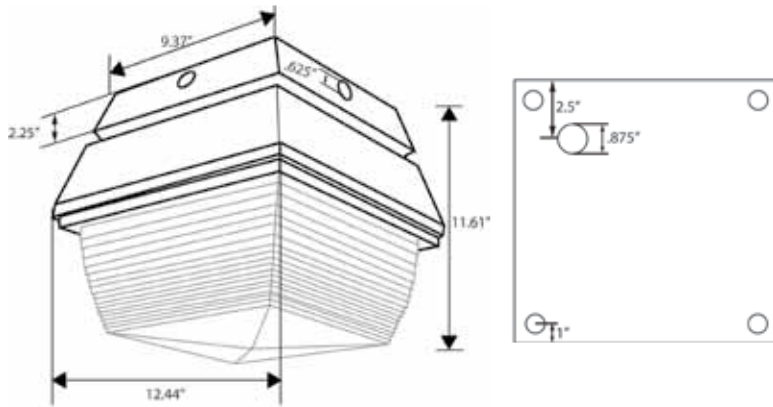

Photometric Data

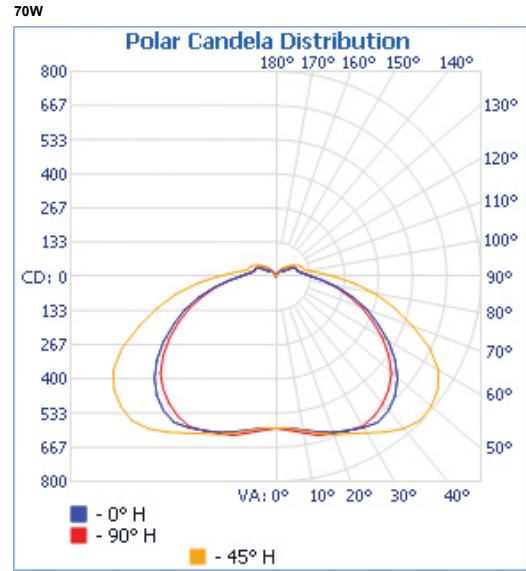

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W / 28W	5,900/2,400	84	82-85	5000	100,000 hours
80W / 32W	7,150/2,900	84	82-85	5000	100,000 hours
100W / 40W	8,400/3,400	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
44	120-277V/480V*	0.38-0.17A / 0.10A	50/60Hz	>0.95	-40 to 130 F°	<10%
61	120-277V/480V*	0.50-0.21A / 0.19A	50/60Hz	>0.95	-40 to 130 F°	<10%
78W/ 82.6 / 36.6 dimmed	120-277V/480V*	0.69-0.30A / 0.17A	50/60Hz	>0.95	-40 to 130 F°	<10%
90W/ 94.4 / 46.9 dimmed	120-277V/480V*	0.79-0.34A / 0.20A	50/60Hz	>0.95	-40 to 130 F°	<10%
111W/ 118.0 / 58.5 dimmed	120-277V/480V*	0.98-0.43A / 0.25A	50/60Hz	>0.95	-40 to 130 F°	<10%

Application Image



UC Davis wins 2009 Best Practice Award using EverLast® Smart Light Technology.

Estimated yearly energy savings \$77,000. Fixture operates at 40% power until sensor is triggered, then fixture steps up to 100% illumination.

North Entry Parking Garage, Davis CA

Call Toll Free: 888-383-7578

www.everlastlight.com