


Tools Required

- T20 TORX Driver
- Adjustable Wrench
- Small Flat Head Screwdriver

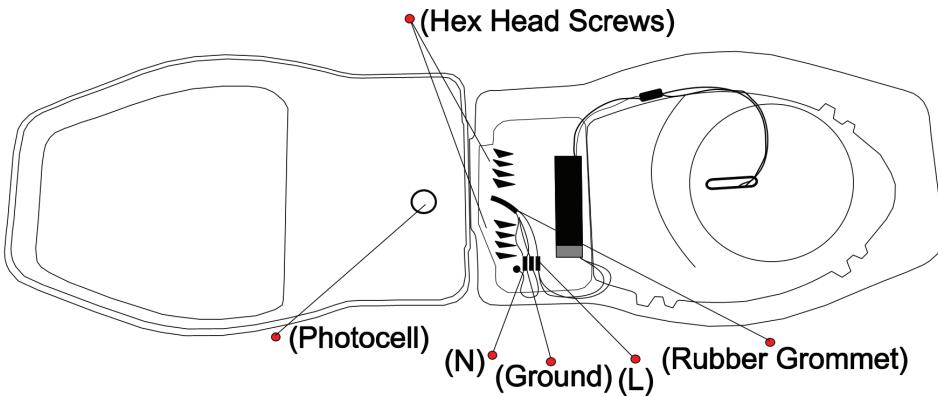


(Figure 1A)

Fixture Mounting

1. To open the fixture cover loosen the two TORX® head screws that are located on the middle of each side of the fixture where the top half meets the bottom using a T20 TORX® bit. **(Figure 1B)**
2. Slide fixture onto mounting bracket while making sure the power wires are fed through the rubber grommet.
3. Place nuts on the bolts and tighten securing the fixture to the mounting bracket.

Electrical Wiring

1. Connect supply ground wire to ground wire position of terminal block. **(Figure 2A & 2B reverse side)**
2. Connect supply line conductor to **(L)** black wire position of terminal block.
3. Connect supply neutral conductor **(N)** white wire position of terminal block.
4. Push excess wires into pole.
5. To close cover tighten the six TORX® head screws that are located around the fixture where the top half meets the bottom using a T20 TORX® bit.

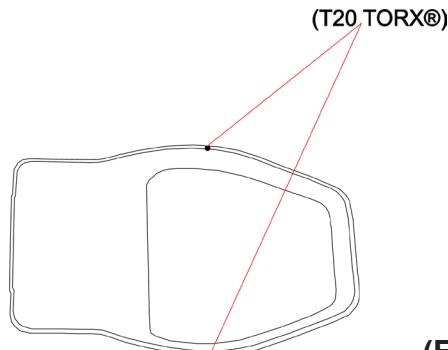


(Figure 1B)

! CAUTIONS

1. To avoid the possibility of electrical shock, turn off power supply before installation or servicing.
2. When closing cover of fixture make sure all wires are inside of housing to avoid pinching the wires.
3. This product must be installed in accord with the applicable installation code by someone familiar with the construction and operation of the product and hazards involved.
4. If mounting bolts are completely removed in the field they should be hand threaded (prior to use of hand tools) to ensure proper fit of the thread when re-installing. Failure to pre-start threads may result in cross-threading or stripping of the bolts during reinstallation.


Photocell Receptacle

1. To remove photocell give it 1/4 turn counterclockwise pull and remove. **(Figure 2C)**
2. Loosen the two TORX® head screws holding the photocell receptacle housing a few turns using a T20 TORX® bit.
3. Locate the N symbol on the receptacle, representing north.
4. Rotate N approximately north, some photo controls operate best somewhere between NW and NE.
5. Once orientation of receptacle is complete, tighten screws from **Step 2**.

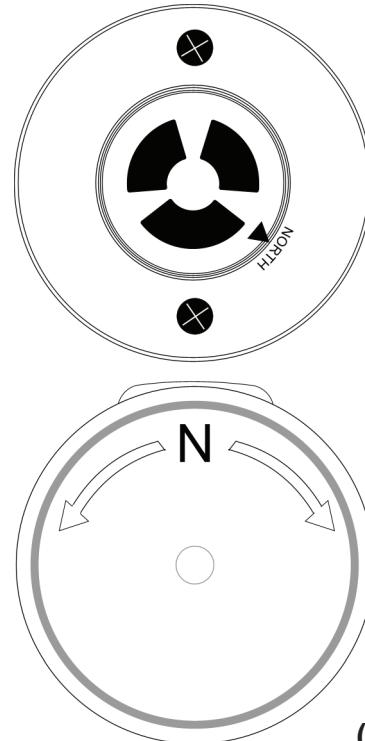


(Figure 2C)

Wiring Diagram for:
 ESBUS-EC-40W
 ESBUS-EC-70W
 ESBUS-EC-100W
 ESBUS-EC-120W

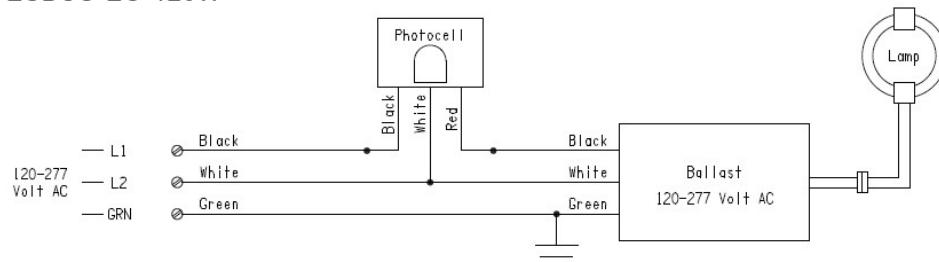

(Figure 2A)

Wiring Diagram for:
 ESBUS-EC-40W-480
 ESBUS-EC-70W-480
 ESBUS-EC-100W-480
 ESBUS-EC-120W-480

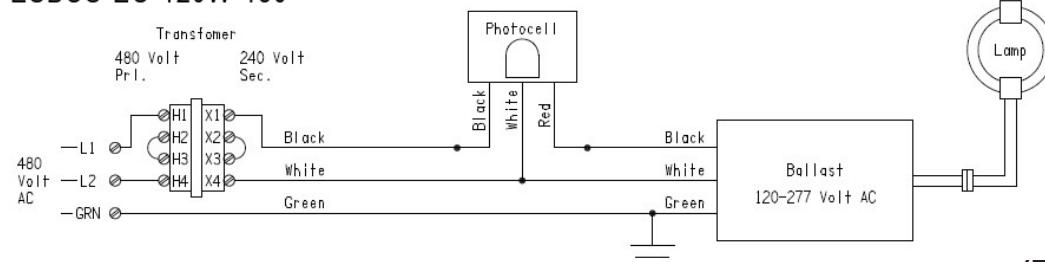

(Figure 2B)