



Superior Opaque/White High Bay



Manufactured in U.S.A.
Per Buy American Act 41U.S.C.

*Protected by U.S. Patents No. 4,839,781.
Additional Patents Pending.


Description

- Series: EHBUS-RC
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-90 CRI
- IP Rating: IP43
- Applications: Warehouses, factories, retail showrooms, gymnasiums, supermarkets, exhibition halls
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Highly reflective microcellular foamed acrylic reflector with US Patented optics
- Conical lens lifts main beam and diffuses image
- Stainless steel roll-form clamp band
- Provides a soft glowing appearance with just the right amount of uplight while improving downlight
- Die cast aluminum ballast casing with corrosion-resistant white powder coat finish
- Electronic ballast with high power factor, flicker free instant re-strike
- Excellent vibration and shock resistance

Ordering Information

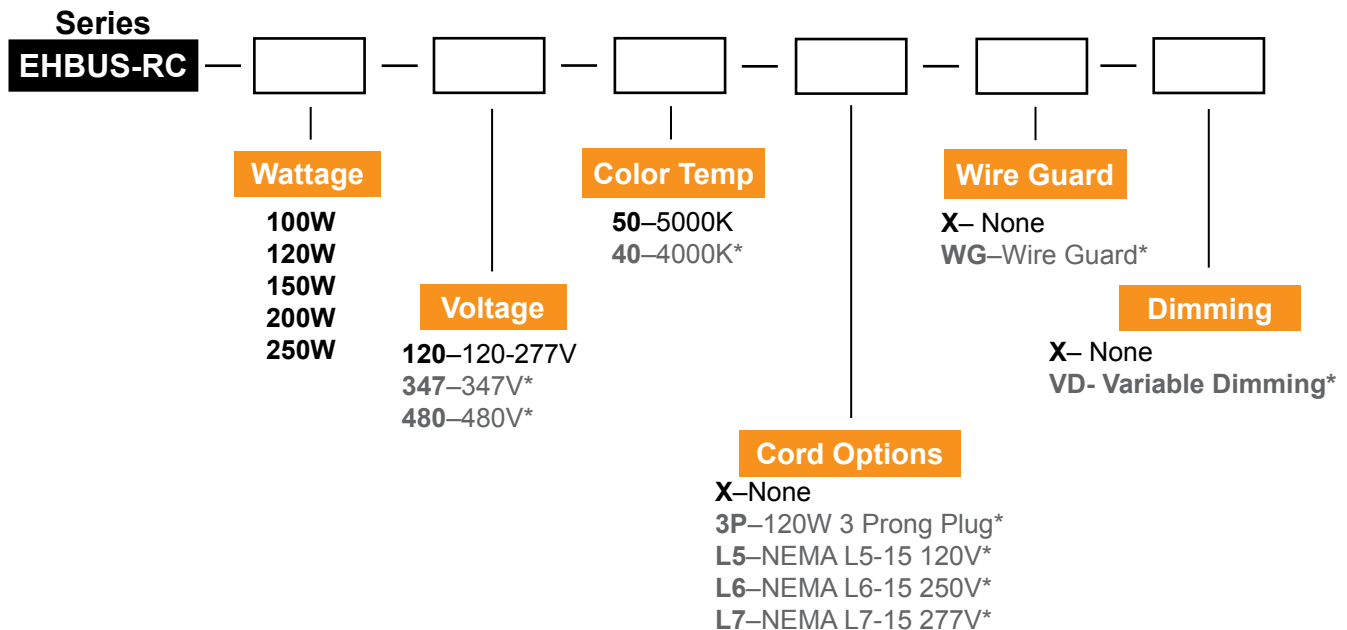

Bold = Standard

Grey * = Upgrade options available upon request

Example: **EHBUS-RC-150-120-50-L7-X-X**

*Legal Notice: Full Spectrum Solutions owns proprietary rights in the EverLast® Series of fixtures in the form of pending patent applications in the US and PCT applications for International protection.


Call Toll Free: 888-383-7578

www.everlastlight.com


© 2012 EverLast® Lighting. All Rights Reserved. Published by EverLast® Lighting, 2021 Wellworth Avenue, Jackson, Michigan 49203. Reproduction in part or whole of this document in any commercial uses including publication, broadcasting or redistribution in any medium without the prior written permission of the publisher is prohibited.



Dimensions

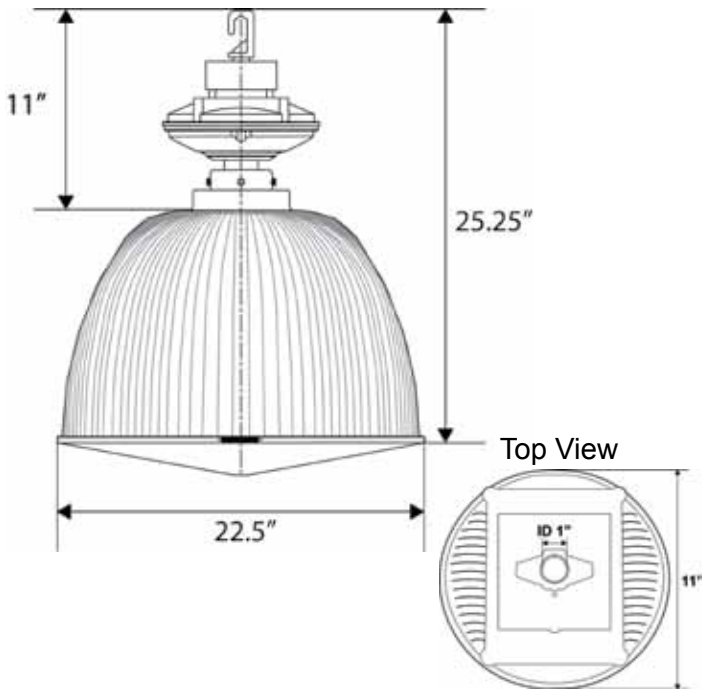

Photometric Data

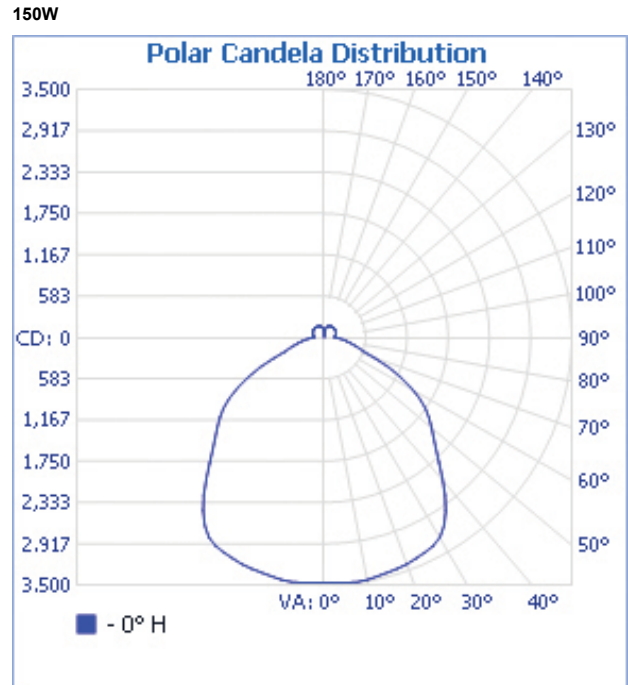

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
100W	8,400	84	82-85	5000	100,000 hours
120W	10,100	84	82-85	5000	100,000 hours
150W	12,600	84	82-85	5000	100,000 hours
200W	16,800	84	82-85	5000	100,000 hours
250W	21,000	84	86-90	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
111W	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-20 to 130 F°	<10%
134W	120-277V/480V*	1.05-0.46A / 0.28A	50/60Hz	>0.95	-20 to 130 F°	<10%
165W	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-20 to 130 F°	<10%
215W	120-277V/480V*	1.77-0.80A / 0.45A	50/60Hz	>0.95	-20 to 130 F°	<10%
265W	120-277V/480V*	2.21-1.00A / 0.56A	50/60Hz	>0.95	-20 to 130 F°	<10%

Application Image



Model A Fitness, Boonton NJ

Call Toll Free: 888-383-7578

www.everlastlight.com