



Decorative Walkway




Description

- Series: EDW-EC
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: 54
- Applications: Parks, shopping malls, outlets, plazas, city halls, historic areas, city sidewalks
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Decorative architectural design with corrosion resistant powder coated aluminum alloy housing
- Smooth flat lens provides effective light distribution and reduced glare
- Integrated light lid reduces high beam angle and promotes dark sky integrity
- Induction lamp geometry ideal for even Type V distribution
- Electronic ballast with high power factor
- Excellent vibration and shock resistance

Ordering Information

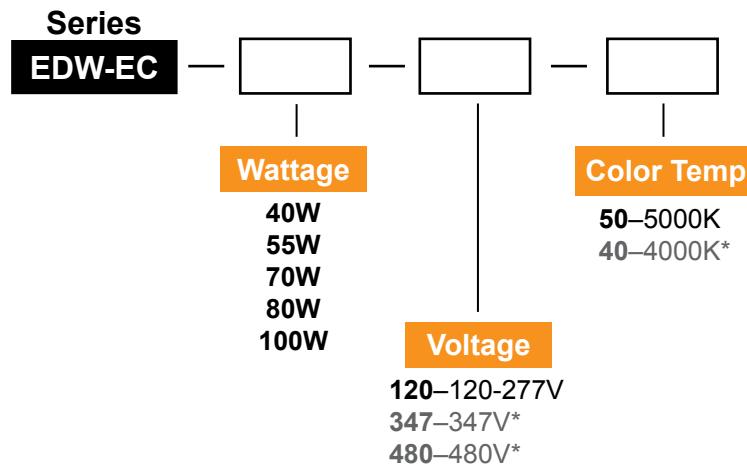

Bold = Standard


Grey * = Upgrade options available upon request

Example: **EDW-EC-40-120-50**


Call Toll Free: 888-383-7578

www.everlastlight.com

Dimensions

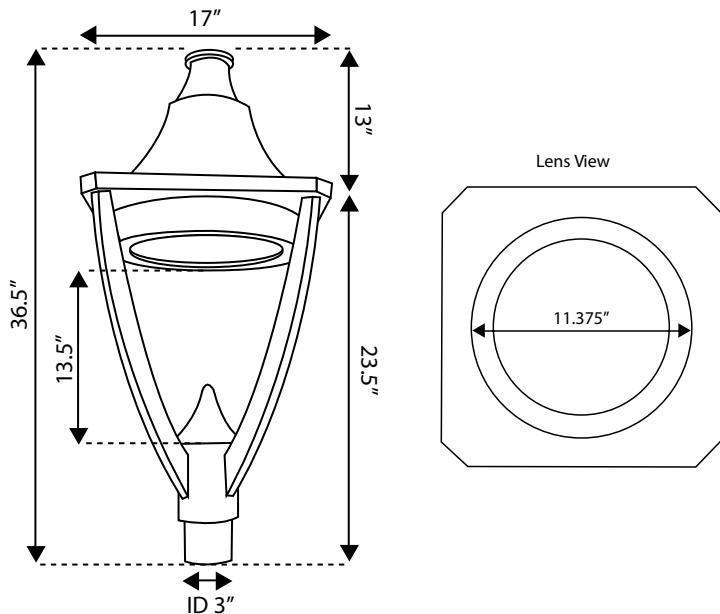

Photometric Data

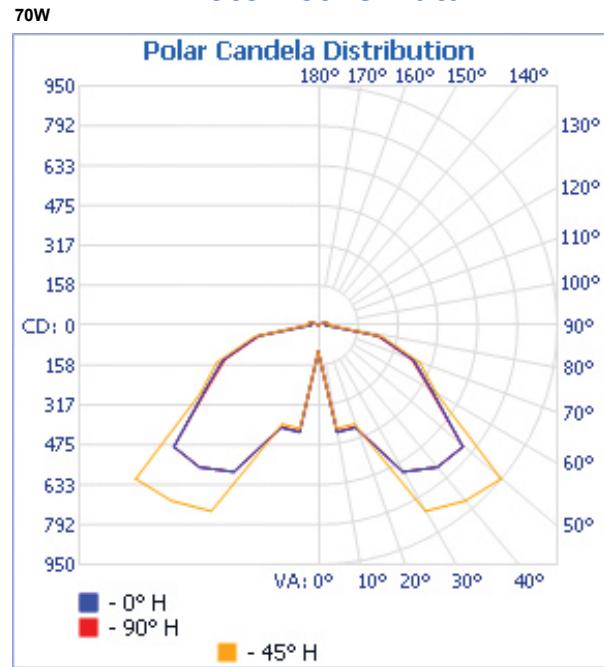

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
40W	3,350	84	82-85	5000	100,000 hours
55W	4,650	84	82-85	5000	100,000 hours
70W	5,900	84	82-85	5000	100,000 hours
80W	7,150	84	82-85	5000	100,000 hours
100W	8,400	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
EB-40W	120-277V/480V*	0.38-0.17A / 0.10A	50/60Hz	>0.95	-40 to 130 F°	<10%
EB-55W	120-277V/480V*	0.50-0.21A / 0.13A	50/60Hz	>0.95	-40 to 130 F°	<10%
EB-70W	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-40 to 130 F°	<10%
EB-80W	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-40 to 130 F°	<10%
EB-100W	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-40 to 130 F°	<10%

Application Image



City Streets

Call Toll Free: 888-383-7578

www.everlastlight.com