



Classic Flood Light




Description

- Series: EFL-ED
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP65
- Applications: Billboards, buildings, parks, pools, parking lots, athletic courts, plazas
- Warranty: 10 Year Limited

Specifications and Patent Pending Features

- Die cast aluminum housing with black powder coated finish for corrosion-resistance
- Tempered glass lens and anodized aluminum reflector designed to optimize light distribution
- Gas-tight silicon rubber seal made for wet locations
- Electronic ballast with high power factor
- Excellent vibration & shock resistance

Ordering Information

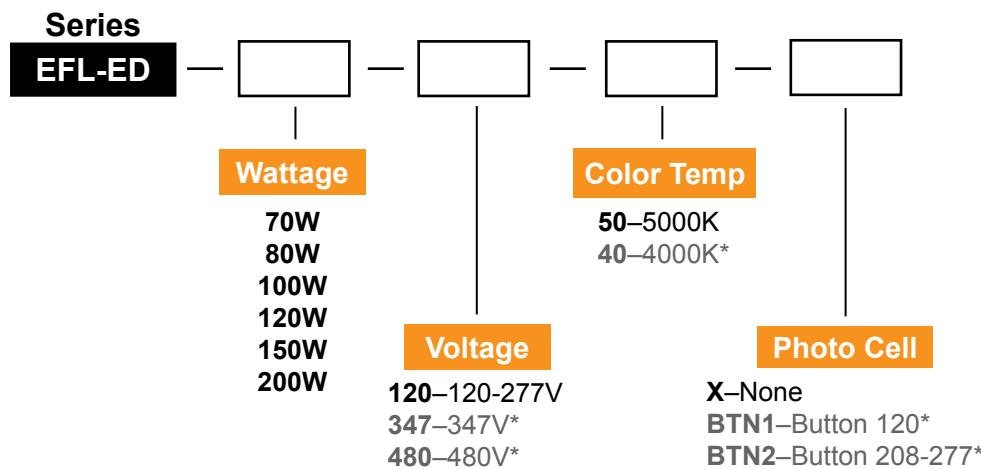

Bold = Standard


Grey * = Upgrade options available upon request

Example: **EFL-ED-70-120-50-X**


Call Toll Free: 888-383-7578

www.everlastlight.com

Dimensions

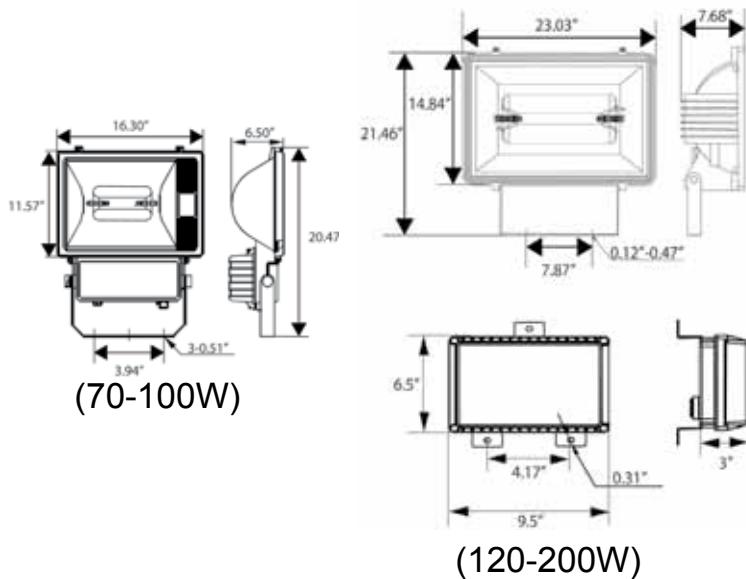

Photometric Data

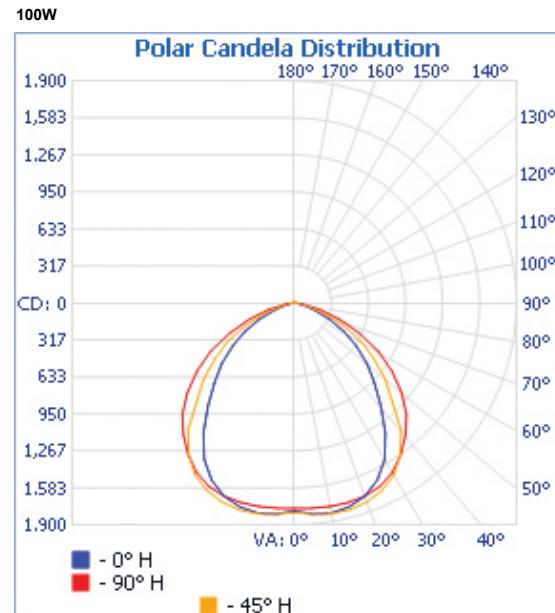

Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
70W	5,900	84	82-85	5000	100,000 hours
80W	7,150	84	82-85	5000	100,000 hours
100W	8,400	84	82-85	5000	100,000 hours
120W	10,100	84	82-85	5000	100,000 hours
150W	12,600	84	82-85	5000	100,000 hours
200W	16,800	84	82-85	5000	100,000 hours

Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
78W	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-30 to 130 F°	<10%
90W	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-30 to 130 F°	<10%
111W	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-30 to 130 F°	<10%
134W	120-277V/480V*	1.05-0.46A / 0.28A	50/60Hz	>0.95	-30 to 130 F°	<10%
165W	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-30 to 130 F°	<10%
215W	120-277V/480V*	1.77-0.80A / 0.45A	50/60Hz	>0.95	-30 to 130 F°	<10%

Application Image



Industrial Building

Call Toll Free: 888-383-7578

www.everlastlight.com