

## Canopy/Freezer Light




### Description

- Series: EGS-ED
- Lamp Life Rating: 100,000 hours
- Lumen Maintenance: 70% over 100,000 hours
- Light Output: 5000K, 82-85 CRI
- IP Rating: IP65
- Applications: Parking garages, gas stations, schools, shopping malls, coolers, freezers
- Warranty: 10 Year Limited

### Specifications and Patent Pending Features

- Die cast aluminum housing gray powder coated finish for corrosion-resistance
- Anodized aluminum reflector designed to optimize light distribution
- Clear tempered glass or optional polycarbonate lens
- Electronic ballast with high power factor
- Excellent vibration and shock resistance

### Ordering Information

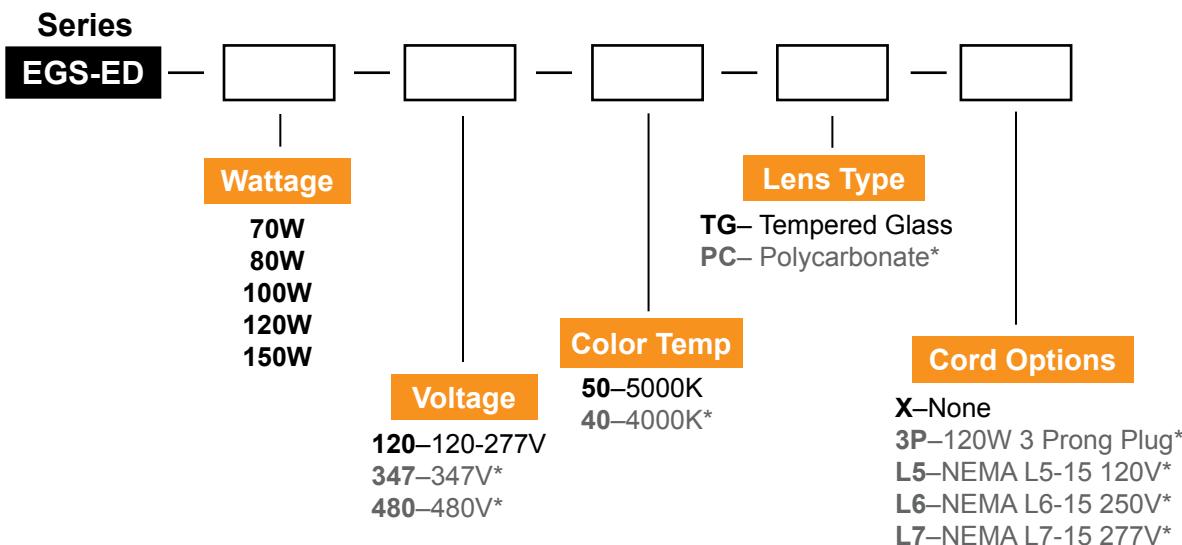

**Bold** = Standard


Grey \* = Upgrade options available upon request

Example: **EGS-ED-70-120-50-TG-L5**


Call Toll Free: 888-383-7578

[www.everlastlight.com](http://www.everlastlight.com)

## Dimensions

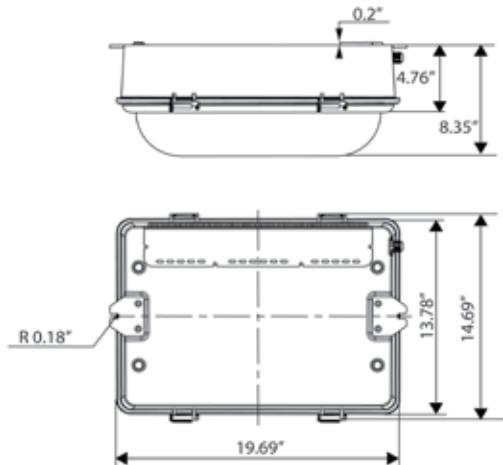

## Photometric Data

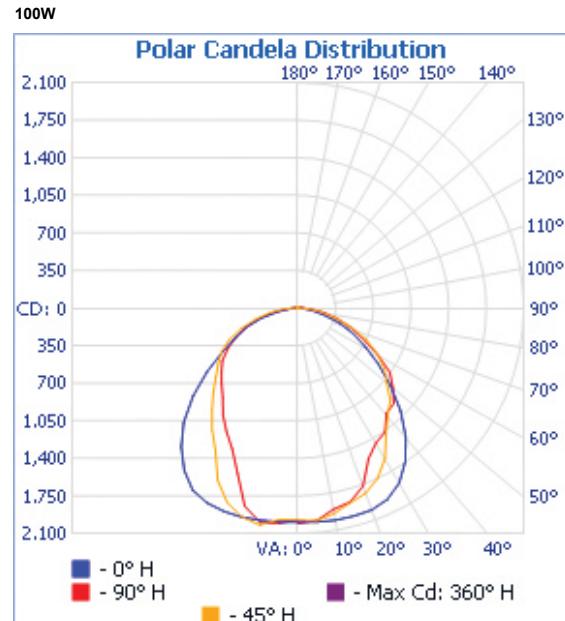

### Lamp Specifications

Wattage	Lumens	L/W Ratio	CRI	CCT (KELVIN)	Rated Life
70W	5,900	84	82-85	5000	100,000 hours
80W	7,150	84	82-85	5000	100,000 hours
100W	8,400	84	82-85	5000	100,000 hours
120W	10,100	84	82-85	5000	100,000 hours
150W	12,600	84	82-85	5000	100,000 hours

### Ballast Specifications

System Wattage	Input Voltage	Input Current	Input Freq.	Power Factor	Ambient Temp	THD
78W	120-277V/480V*	0.63-0.29A / 0.16A	50/60Hz	>0.95	-30 to 130 F°	<10%
90W	120-277V/480V*	0.70-0.32A / 0.19A	50/60Hz	>0.95	-30 to 130 F°	<10%
111W	120-277V/480V*	0.93-0.42A / 0.22A	50/60Hz	>0.95	-30 to 130 F°	<10%
134W	120-277V/480V*	1.05-0.46A / 0.28A	50/60Hz	>0.95	-30 to 130 F°	<10%
165W	120-277V/480V*	1.35-0.61A / 0.35A	50/60Hz	>0.95	-30 to 130 F°	<10%

## Application Image



Mobil Gas Station, Brooklyn MI

Call Toll Free: 888-383-7578

[www.everlastlight.com](http://www.everlastlight.com)