



# EVERLAST LED HIGH LUMEN 15D LEGEND ALUMINUM 22” 100W / 15,953LM

The EVERLAST LED HIGH LUMEN 15D LEGEND 100W fixture achieves 15,953 LUMENS.

Industry-leading output (160 LPW) places the HL15D High Bay well above the competition. With its classic round form, the HL15D High Bay fits discretely into any high ceiling lighting application.

The superior lumen output of the HL15D High Bay translates into considerable energy savings, improved visibility / productivity, and increased safety. The fully customizable HL15D is Built For You.

### APPLICATION

Industrial and warehouse, large retail, gymnasium, and athletic facility applications.

### FEATURES & BENEFITS

- 160 Lumens / Watt
- 10-year Limited Warranty
- Meanwell HBG LED Driver w/ 1-10V dimming offers high performance and control compatibility

### LED MODULE

- Lumileds LED chips provide unmatched efficiency, heat dissipation, stability, and lumen maintenance
- 80 CRI
- 120° light distribution
- LM-79 Tests (IESNA standard)

### APPROVALS / LISTINGS

- UL1598
- IP65 Rated
- Temperature rated -22° to 122°F (-30° to 50°C)
- CE / RoHS compliant
- LM80 & TM21 data available on request

### MATERIALS

- Diecast aluminum driver housing with powder coat finish
- Diecast aluminum heat sink


### SIZE / WEIGHT (PACKAGED)

15.1" x 22.4" x 22.4" (20.0" x 23.5" x 23.5")  
16.1 lbs. (23.3 lbs.)

### MOUNTING HARDWARE

M12 Hook (standard), 1/2" or 3/4" NPT Adaptor / Flange\* (optional), or M12 Eyelet (optional)

## FIXTURE

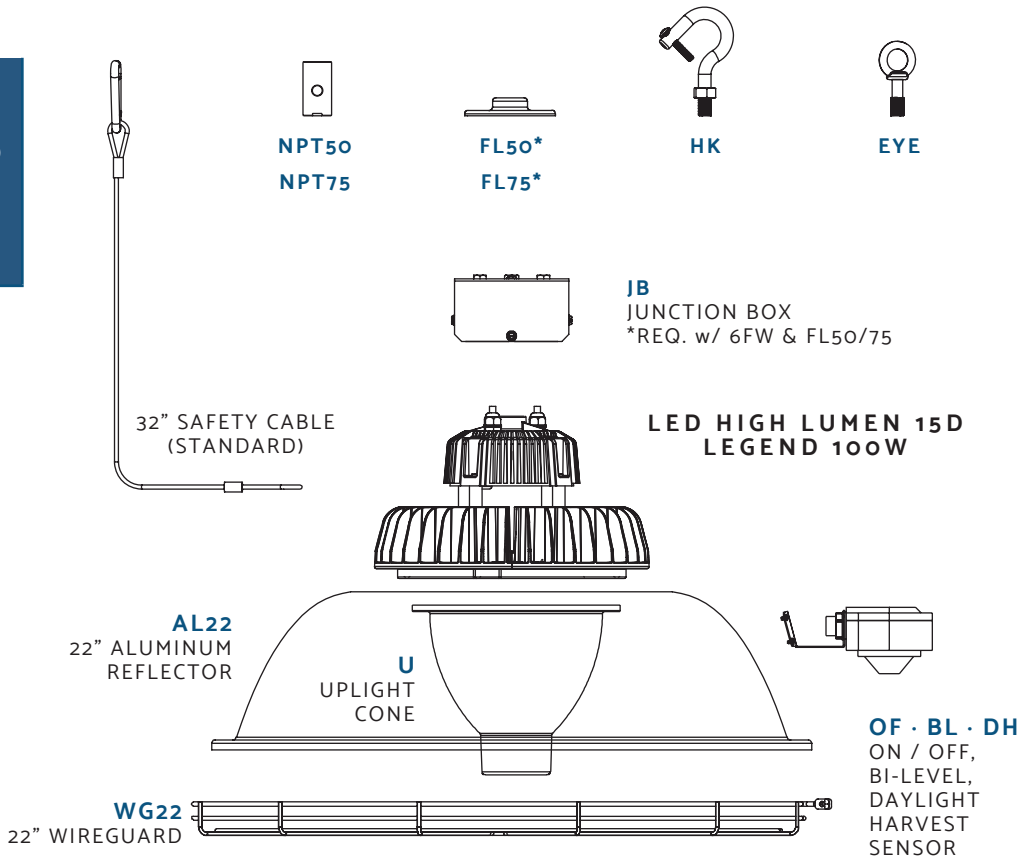

## BASE

EL-LED-HL15D-LG-	100-			
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP.	LENS
EL-LED-HL15D-LG- EVERLAST LED HIGH LUMEN 15DIECAST LEGEND	100 WATT 15,953 LUMENS	L 120-277V AC UH 347-480V AC	50 5000K 40 4000K 30 3000K	X 120° FLAT LENS

## ACCESSORY

### REFLECTOR

AL22 22" ALUMINUM REFLECTOR  
U UPLIGHT CONE

### CORD

S9W 9' WHITE 120V STANDARD  
L59W 9' WHITE 120V TWIST LOCK  
L69W 9' WHITE 240V TWIST LOCK  
L79W 9' WHITE 277V TWIST LOCK  
6FW\* 6' FLEXIBLE CONDUIT

S9B 9' BLACK 120V STANDARD  
L59B 9' BLACK 120V TWIST LOCK  
L69B 9' BLACK 240V TWIST LOCK  
L79B 9' BLACK 277V TWIST LOCK  
9BCNO 9' BLACK NO PLUG

### SENSOR

D 1-10V DIMMING  
OF ON / OFF  
BL BILEVEL  
DH DAYLIGHT HARVEST

### MOUNT

EYE M12 EYELET  
FL50\* 1/2" NPT FLANGE  
FL75\* 3/4" NPT FLANGE  
HK M12 HOOK  
NPT50 1/2" NPT ADAPTOR  
NPT75 3/4" NPT ADAPTOR

### OTHER

JB JUNCTION BOX  
W WHITE FIXTURE  
SC20 240" SAFETY CABLE  
WG22 22" WIREGUARD

\*REQUIRES JUNCTION BOX



## EVERLAST LED HIGH LUMEN 15D LEGEND ALUMINUM 22” 100W / 15,953LM

### SPECS

#### EMITTER (LUMILEDS) & DRIVER (MEANWELL HBG LED)

SYSTEM WATTS (120-277V AC)	INITIAL DELIVERED LUMENS (5000K) 80CRI	NUMBER OF LEDS	TOTAL CURRENT / FIXTURE				
			120V AC	208V AC	240V AC	277V AC	480V AC
100	15,953	224	0.83	0.48	0.42	0.36	0.21

### INPUT

VOLTAGE RANGE	FREQUENCY RANGE	POWER FACTOR	TOTAL HARMONIC DISTORTION (DURING OUTPUT LOAD)	EFFICIENCY (230V AC / 277V AC)
90-305V AC 347-480V AC	50 / 60 Hz	0.93 - 0.98	THD < 15%	>90%

### DIMENSIONS

