



EVERLAST[®]
LIGHTING

BASE PART #

PROJECT

NOTES



GUARDIAN BANTAM WALL PACK LED 20W / 1,980LM

The **LED 20W GUARDIAN BANTAM WALL PACK** fixture achieves **1,980 LUMENS**.

The **LED 20W GUARDIAN BANTAM WALL PACK** fixture provides substantial light from a small package. Utilizing chip on board (COB) technology, multiple LED chips are bonded directly to the substrate to form a single module. This packaging takes less space and obtains the full potential of the LED chips.

Simple installation into new or existing applications due to its small package, this LED wall pack fixture offers a warm, consistent lighting solution for any outdoor, vertical space.

APPLICATION

This outdoor wall pack fixture is ideal for any application requiring nondescript lighting, including residential, historic area, parks, shopping mall, and courtyard applications.

FEATURES & BENEFITS

- 10-year Limited Warranty
- Silicon rubber gasket seal
- UV resistant, polycarbonate lens
- Soft and warm surface light, no shadow
- High thermal conductive material
- Highly efficient cooling system

LED & OPTICAL ASSEMBLY

- LED Chip On Board (COB) Emitters
- 80+ CRI
- LM79 Tests in accordance with IESNA standards

APPROVALS / LISTINGS

- DLC Listed
- IP65 per ANSI C126.25-2009
- ETL Listed to UL1598
- Temperature rated -40°C to 40°C
- CE / RoHS compliant
- LM80 & TM21 data available on request

MATERIALS

- High pressure, diecast aluminum housing with bronze, anti-static powder coat finish for improved corrosion resistance & heat transfer

SIZE / WEIGHT (PACKAGED)

8.9" x 6.1" x 2.8" (12.0" x 10.0" x 6.0")

5 lbs. (6 lbs.)

MOUNTING

Designed for simple wall mount in new and retrofit applications.



ORDER INFORMATION

e.g., EL-LED-GDB-20-UL-X-50-CO						
SERIES	WATTAGE	VOLTAGE	DIMMING	COLOR TEMP	CUTOFF	OPTIONS
EL-LED-GDB	20					
EL-LED-GDB EVERLAST LED GUARDIAN BANTAM WALL PACK	20 WATT 1,980 LUMENS	UL UNIVERSAL (120-277V AC)	X NONE D DIMMING (0-10V)	50 5000K 80+CRI 40 4000K 80+CRI	CO STANDARD CUTOFF	BTN1 120V BUTTON PHOTOCELL BTN2 208-277V BUTTON PHOTOCELL

FAX 866-366-4029

WWW.EVERLASTLIGHT.COM

CALL 888-383-7578



EVERLAST
LIGHTING

BASE PART #

PROJECT

NOTES



GUARDIAN BANTAM WALL PACK LED 20W / 1,980LM


EMITTER & DRIVER SPECIFICATIONS

SYSTEM WATTS (120-277V AC)	INITIAL DELIVERED LUMENS (5000K) 80+ CRI	NUMBER OF LEDs	TOTAL CURRENT / FIXTURE			
			120V AC	208V AC	240V AC	277V AC
20	1,980	1 COB	0.17	0.10	0.08	0.07


INPUT

VOLTAGE RANGE	FREQUENCY RANGE	POWER FACTOR	TOTAL HARMONIC DISTORTION	EFFICIENCY (230V AC / 277V AC)
120-277V AC	50 / 60 Hz	0.92	THD < 15% when Output Loading	


FRONT

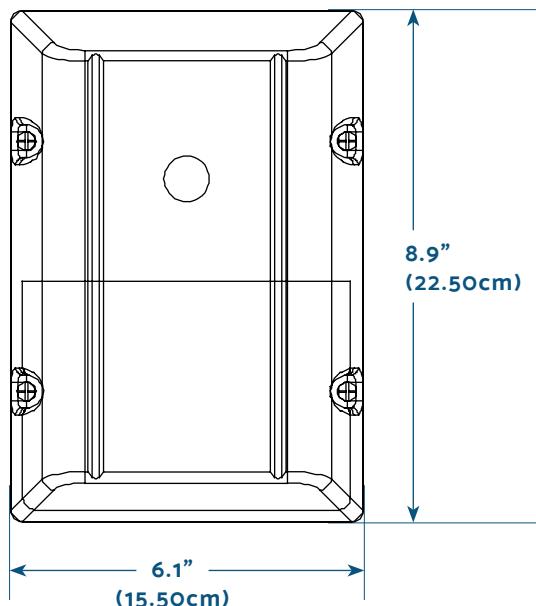

BACK

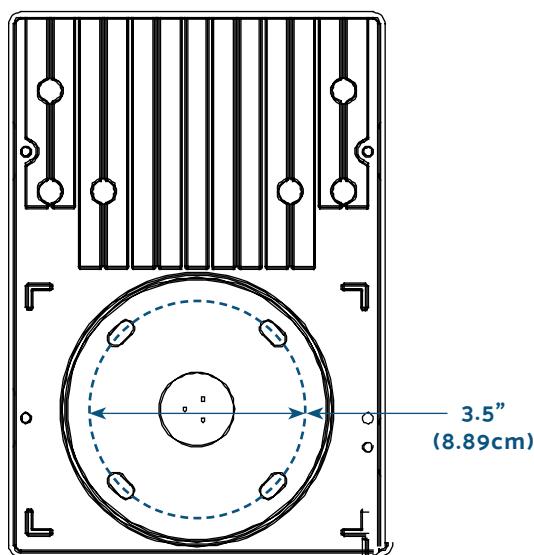

SIDE

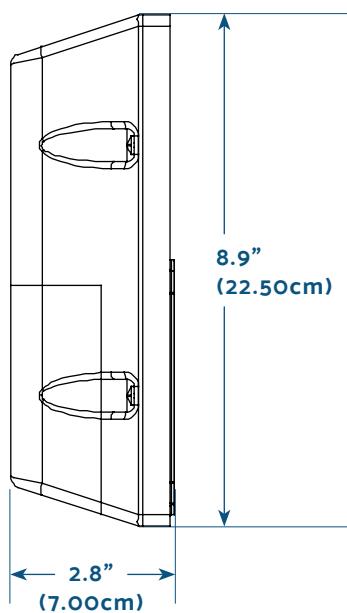

FAX 866-366-4029

WWW.EVERLASTLIGHT.COM

CALL 888-383-7578