



# EVERLAST LED WALKWAY ACORN 75W / 7,500LM

The EVERLAST LED WALKWAY ACORN 75W fixture achieves 7,500 LUMENS.

This fixture offers a classic acorn globe form (with optional finial) that will fit in most any exterior area lighting application. In addition to its vintage look, the LED WALKWAY ACORN provides minimal uplight and reduces driver and pedestrian glare.

The LED WALKWAY ACORN offers Frost (Polycarbonate - Type V) and Prismatic (Acrylic - Type III & V) lens options.

### APPLICATION

Park, shopping mall and outlet, city hall and plaza, and historic area lighting applications.

### FEATURES & BENEFITS

- 10-year Limited Warranty.
- Superior proprietary optics produce high target efficacy and low glare.

### LED & OPTICAL ASSEMBLY

- Nichia Emitters
- 80 CRI LED Chips
- Type III and V Light Distribution
- UV stabilized acrylic or polycarbonate, over optic lens provides optimal light distribution and enhanced durability

### APPROVALS / LISTINGS

- IP65 Rated Temperature rated -40°C to 50°C (-40°F to 122°F)
- CE / RoHS Compliant
- LM80 and TM21 data available upon request

### MATERIALS

- High strength, cast aluminum base with black, powder coating for corrosion resistance and heat transfer
- Prismatic acrylic, or optional polycarbonate, lens offers premium light distribution
- Excellent vibration and shock resistance

### SIZE / WEIGHT (PACKAGED)


**POLYCARBONATE**  
36.2 x 16.6 x 16.6" (40.0" x 18.0" x 18.0")  
34 lbs. (37 lbs.)

**ACRYLIC**  
30.4 x 14.0 x 14.0" (32.0" x 18.0" x 18.0")  
34 lbs. (37 lbs.)

### MOUNTING HARDWARE


Mounts to 3.00" outside diameter (OD) post or tenon.

**FIXTURE**

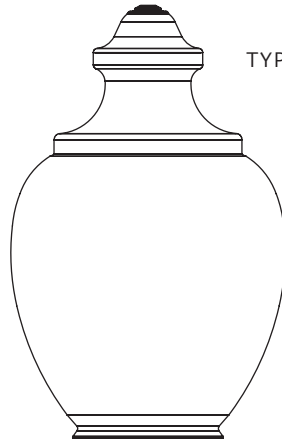


**PY5**  
POLYCARBONATE  
ACORN GLOBE

FROST POLYCARBONATE  
TYPE V (**PY5**) OR  
PRISMATIC ACRYLIC  
TYPE III (**AC3**) OR TYPE V (**AC5**)  
**ACORN GLOBE**  
OPTIONS

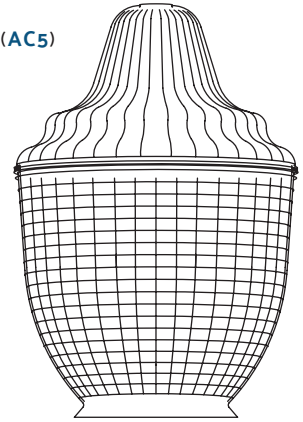

**AC3 / AC5**  
ACRYLIC  
ACORN GLOBE

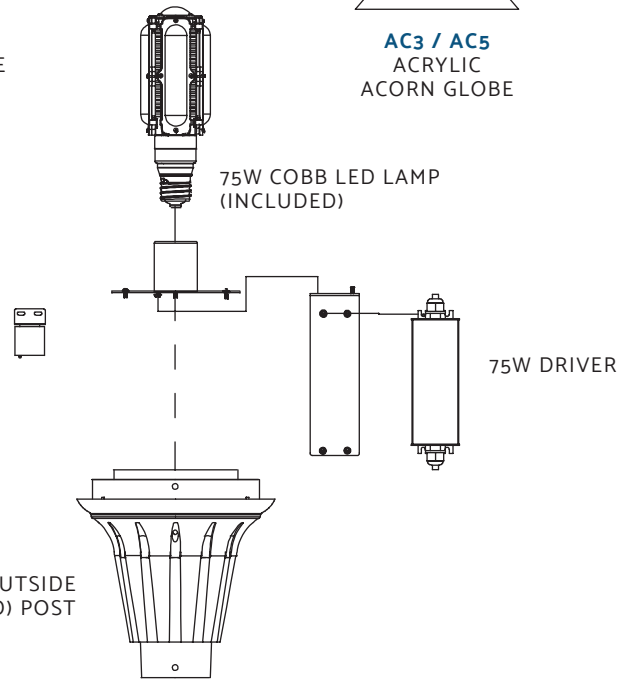

**BASE**

	EL-LED-WS-	75-	
<b>FIXTURE</b>		<b>WATTAGE</b>	<b>VOLTAGE</b>
EL-LED-WS- EVERLAST LED WALKWAY ACORN		75 WATT 7,500 LUMENS	UL UNIVERSAL (120-277V AC)

**ACCESSORY**

<b>LENS TYPE</b>	<b>LIGHT LID (AC ONLY)</b>	<b>COLOR TEMP</b>	<b>SENSOR</b>	<b>OPTION</b>
AC3 ACRYLIC TYPE III	X NONE S SOLID	50 5000K / 80 CRI	PC PHOTOCELL SP SURGE PROTECTOR	X NONE SF SPIKE FINIAL
AC5 ACRYLIC TYPE V	P PERFORATED			
PY5 POLYCARBONATE TYPE V				



# EVERLAST LED WALKWAY ACORN 75W / 7,500LM

**SPECS**

**EMITTER (LUMILEDS) & DRIVER (MEANWELL HBG LED)**


SYSTEM WATTS (120-277V AC)	INITIAL DELIVERED LUMENS (5000K) 80CRI	NUMBER OF LEDS	TOTAL CURRENT / FIXTURE			
			120V AC	208V AC	240V AC	277V AC
75	7,500	108	0.63	0.36	0.31	0.27

**INPUT**


VOLTAGE RANGE	FREQUENCY RANGE	POWER FACTOR	TOTAL HARMONIC DISTORTION (DURING OUTPUT LOAD)	EFFICIENCY (230V AC / 277V AC)
100-277V AC	50 / 60 Hz	0.93	THD < 10%	>93%

**DIMENSIONS**

**POLYCARBONATE FROST**

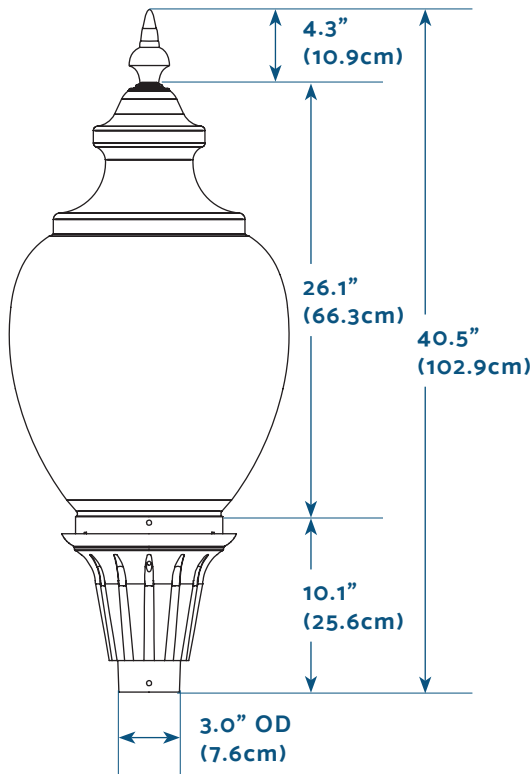


**ACRYLIC PRISMATIC**

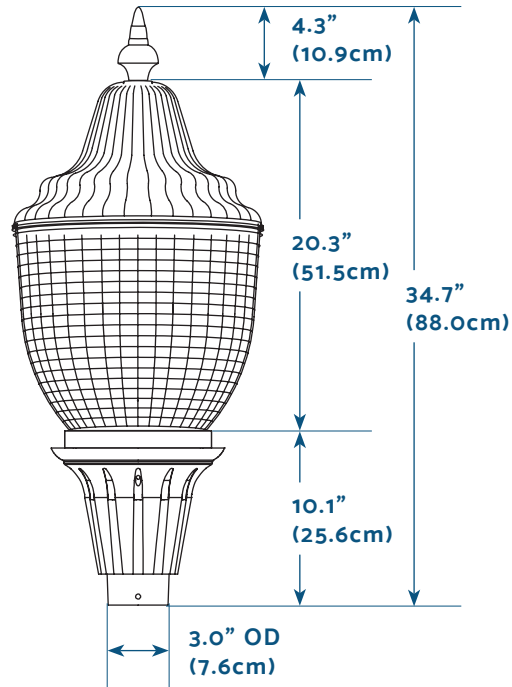

**FINIAL OPTION**



**TOP VIEW**

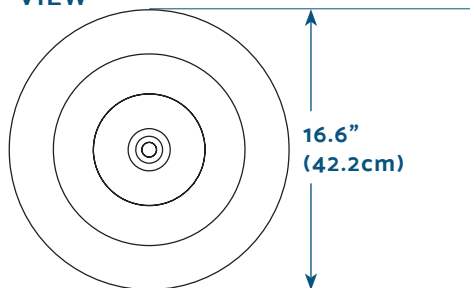

**TOP VIEW**

