

Legend Series

65C13 LED HIGHBAY



The EverLast 65C13 High Temperature LED high bay fixture pushes LED performance and intensity to the next level. Offering a wide range of lumen output levels (26,000 – 31,400), the 65C13 effectively exceeds light levels produced by 750W metal halides. Coupling this intensity with a robustly engineered driver and cold forged heat sink makes the 65C13 the only choice for the most demanding environments.

Backed by EverLast's 5 year limited warranty

SUMMARY

Lumen Output: 200W: 26,200* Lumens @5000k 240W: 31,440* Lumens @5000k
Driver: Moons Emitter: Lumileds LED Chips
Ingress Protection: IP65 Rated
Temperature Rating: -40°F / 149°F
Color Rendering Index: 80 CRI
DLC: Premium**
ETL: To UL 1598
Mechanical Materials: Cold Forged Aluminum Heat Sink Extruded Aluminum Driver Housing With Black (Standard) Powdercoat Finish
Standard Accessories: 1-10V Dimming / 10V PWM / or Resistance 32" Safety Cable Stainless Steel Hook: M12 - 200W & 240W (Standard) 1/2" or 3/4" NPT Adaptor (Optional) M12 Eyelet (Optional)

*Lumen output varies based upon kelvin ratings

**For current DLC and DLC Premium qualified versions available, please visit <https://www.designlights.org/search/>



FIXTURE DIMENSIONS

Wattage	Length	Width	Weight
200w	10.5" (26.7 cm)	11.0" (28.0 cm)	9.2 lbs
240w	10.5" (26.7 cm)	11.0" (28.0 cm)	9.2 lbs

TOTAL CURRENT (amps) / FIXTURE

Wattage	120V AC	240V AC	277V AC	480V AC
200w	1.67	0.83	0.72	0.42
240w	2.00	1.00	0.87	0.50

ORDERING INFORMATION

BASE MODULE

EL-65C13-LG	200	L	30	X
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP	BEAM ANGLE
EL-65C13-LG	200	L 120-277V AC	30 3000K	X 120°
	240	UH 277-480V AC	40 4000K	
		50 5000K		



LEGEND SERIES 65C13 LED HIGHBAY OPTICAL ACCESSORIES

OPTICS

X



Protective Glass Optic*
Provides 120° Beam Angle

REFLECTORS

AL22



22" High Reflectance Spun
Aluminum Reflector. 120° Beam Angle



*Standard Optic on All Wattages

LEGEND 65C13 SERIES LED HIGHBAY ACCESSORIES

CORDS

S9B - 9' BLACK 120V STANDARD
L59B - 9' BLACK 120V TWIST LOCK
L69B - 9' BLACK 240V TWIST LOCK
L79B - 9' BLACK 277V TWIST LOCK
L89B - 9' BLACK 480V TWIST LOCK
6FW - 6' FLEXIBLE CONDUIT

9BCNO - 9' BLACK CORD / NO PLUG
6MCLC - 6' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V)
9MCLC - 9' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V)

PLUG END
OPTIONS



MOUNT

EYE - EYELET
FL50 - 1/2" NPT FLANGE
FL75 - 3/4" NPT FLANGE
HK - HOOK
NPT50 - 1/2" NPT ADAPTOR
NPT75 - 3/4" NPT ADAPTOR



EYE



FL50 / 75



HK



NPT50 / 75

OTHER

JB - JUNCTION BOX
SC20 - 240" SAFETY CABLE




SC20



JB

LUMEN DEPRECIATION

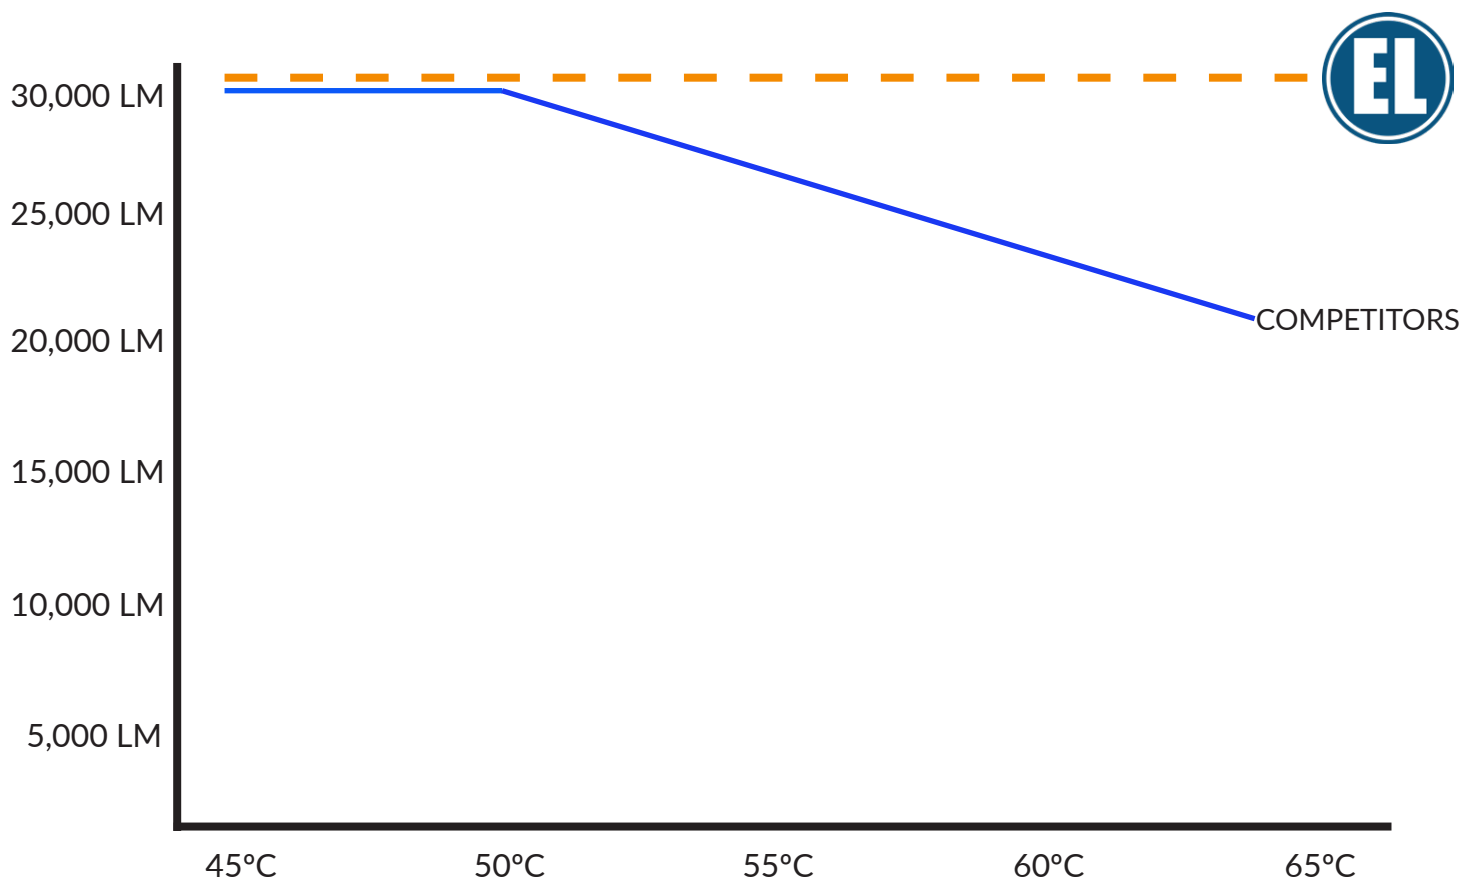

As temperatures climb above 50°C, the competition’s fixtures begin restricting lumen output to combat heat due to inferior components and design. The EverLast 65C13, with its industry proven design does not restrict lumen output or decrease efficiency as temperatures pass 50°C and climb to 65°C. When the application heats up, you get every lumen you pay for with the EverLast 65C13