



## EVERLAST LED GUARDIAN COMPACT WALL PACK 80W / 8,706LM

The LED 80W GUARDIAN COMPACT WALL PACK fixture achieves 8,706 LUMENS.

The LED 80W GUARDIAN COMPACT WALL PACK fixture provides substantial light from a small package. Utilizing chip on board (COB) technology, multiple LED chips are bonded directly to the substrate to form a single module. This packaging takes less space and obtains the full potential of the LED chips.

Simple installation into new or existing applications due to its small package, this LED wall pack fixture offers a warm, consistent lighting solution for any outdoor, vertical space.

### APPLICATION

Commercial, residential, historic area, park, shopping mall, and courtyard - any outdoor application requiring nondescript lighting.

### FEATURES & BENEFITS

- 10-year Limited Warranty
- Silicon rubber gasket seal
- UV resistant, polycarbonate lens
- Soft and warm surface light, no shadow
- High thermal conductive material
- Highly efficient cooling system

### LED & OPTICAL ASSEMBLY

- Cree LED Chip On Board (COB) Emitters
- 75+ CRI
- LM79 Tests in accordance with IESNA standards

### APPROVALS / LISTINGS

- DLC Listed
- IP65 per ANSI C126.25-2009
- ETL Listed to UL1598
- Temperature rated -40°F to 104°F (-40°C to 40°C)
- CE / RoHS compliant
- LM80 & TM21 data available on request

### MATERIALS

High pressure, diecast aluminum housing with dark grey, anti-static powder coat finish for improved corrosion resistance & heat transfer





### SIZE / WEIGHT (PACKAGED)

6.0" x 10.8" x 11.8" (8.0" x 12.0" x 14.0")  
11.0 lbs. (12.0 lbs.)

### MOUNTING HARDWARE

Wall or pole mount - adjustable yoke mount included.

FIXTURE

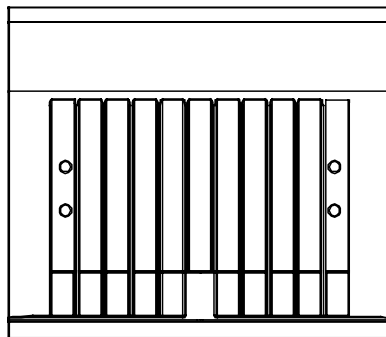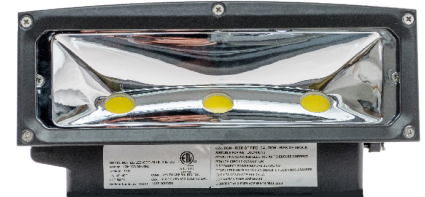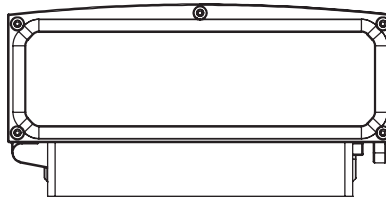

BASE	EL-LED-GDC-	80-					
	<b>FIXTURE</b>	<b>WATTAGE</b>	<b>VOLTAGE</b>	<b>COLOR TEMP.</b>	<b>DIMMING</b>	<b>CUTOFF</b>	<b>OPTIONS</b>
	EL-LED-GDC- EVERLAST LED GUARDIAN COMPACT WALL PACK	80 WATTS 8,706 LUMENS	UL UNIVERSAL (120-277V AC)	50 5000K / 80 CRI 40 4000K / 80 CRI	X NONE D 0-10V DIMMING	CO CUTOFF (STANDARD)	BTN1 120V BUTTON BTN2 PHOTOCELL 208-277V BUTTON PHOTOCELL



# EVERLAST LED GUARDIAN COMPACT WALL PACK

## 80W / 8,706LM

**SPECS**

**EMITTER (CREE) & DRIVER**

SYSTEM WATTS (120-277V AC)	INITIAL DELIVERED LUMENS (5000K) 80CRI	NUMBER OF LEDS	TOTAL CURRENT / FIXTURE			
			120V AC	208V AC	240V AC	277V AC
80	8,706	3 COB	0.67	0.38	0.33	0.29

**INPUT**

VOLTAGE RANGE 120-277V AC	FREQUENCY RANGE 50 / 60 Hz	POWER FACTOR >0.98	TOTAL HARMONIC DISTORTION (DURING OUTPUT LOAD) THD < 15%	EFFICIENCY (230V AC / 277V AC) >87%
------------------------------	-------------------------------	-----------------------	--	---

**DIMENSIONS**

