



EVERLAST
LIGHTING

BASE PART # EL-LED-GDC-80-

PROJECT



EVERLAST LED GUARDIAN COMPACT WALL PACK

80W / 8,706LM

The LED 80W GUARDIAN COMPACT WALL PACK fixture achieves 8,706 LUMENS.

The LED 80W GUARDIAN COMPACT WALL PACK fixture provides substantial light from a small package. Utilizing chip on board (COB) technology, multiple LED chips are bonded directly to the substrate to form a single module. This packaging takes less space and obtains the full potential of the LED chips.

Simple installation into new or existing applications due to its small package, this LED wall pack fixture offers a warm, consistent lighting solution for any outdoor, vertical space.

FIXTURE




APPLICATION

Commercial, residential, historic area, park, shopping mall, and courtyard – any outdoor application requiring nondescript lighting.

FEATURES & BENEFITS

- 10-year Limited Warranty
- Silicon rubber gasket seal
- UV resistant, polycarbonate lens
- Soft and warm surface light, no shadow
- High thermal conductive material
- Highly efficient cooling system


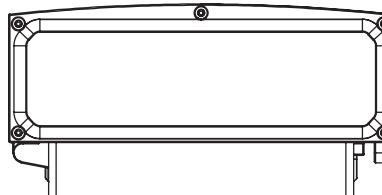


LED & OPTICAL ASSEMBLY

- Cree LED Chip On Board (COB) Emitters
- 75+ CRI
- LM79 Tests in accordance with IESNA standards

APPROVALS / LISTINGS

- DLC Listed
- IP65 per ANSI C126.25-2009
- ETL Listed to UL1598
- Temperature rated -40°F to 104°F (-40°C to 40°C)
- CE / RoHS compliant
- LM80 & TM21 data available on request

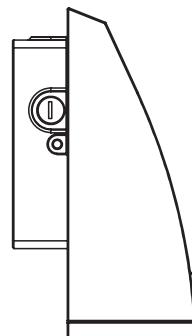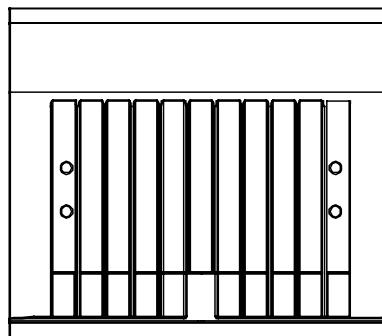

MATERIALS

High pressure, diecast aluminum housing with a bronze, anti-static powder coat finish for improved corrosion resistance & heat transfer

SIZE / WEIGHT (PACKAGED)

6.0" x 10.8" x 11.8" (8.0" x 12.0" x 14.0")
11.0 lbs. (12.0 lbs.)

MOUNTING HARDWARE

Wall or pole mount – adjustable yoke mount included.

BASE

EL-LED-GDC-

80-

Fixture
EL-LED-GDC-
EVERLAST LED
GUARDIAN
COMPACT
WALL PACK

Wattage

80 WATTS
8,706 LUMENS

Voltage

UL UNIVERSAL
(120-277v AC)

Color Temp.

50 5000K / 80 CRI
40 4000K / 80 CRI

Dimming

X NONE
D 0-10V DIMMING

Cutoff

CO CUTOFF
(STANDARD)

Options

BTN1 120V BUTTON
BTN2 PHOTOCELL
208-277V BUTTON
PHOTOCELL

FAX 866-366-4029

WWW.EVERLASTLIGHT.COM

CALL 888-383-7578



EVERLAST[®]
LIGHTING

BASE PART # EL-LED-GDC-80-

PROJECT



EVERLAST LED GUARDIAN COMPACT WALL PACK

80W / 8,706LM

SPECS





EMITTER (CREE) & DRIVER

SYSTEM WATTS (120-277V AC)	INITIAL DELIVERED LUMENS (5000K) 80CRI	NUMBER OF LEDs	TOTAL CURRENT / FIXTURE			
80	8,706	3 COB	120V AC 0.67	208V AC 0.38	240V AC 0.33	277V AC 0.29

INPUT

VOLTAGE RANGE 120-277V AC	FREQUENCY RANGE 50 / 60 Hz	POWER FACTOR >0.98	TOTAL HARMONIC DISTORTION (DURING OUTPUT LOAD) THD < 15%	EFFICIENCY (230V AC / 277V AC) >87%
------------------------------	-------------------------------	-----------------------	--	---

DIMENSIONS

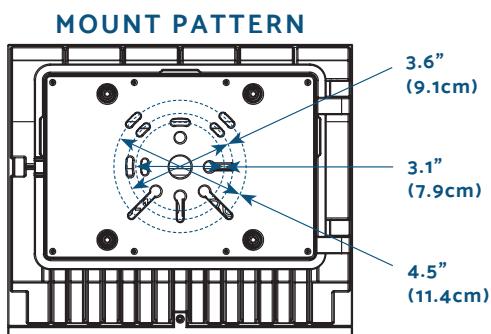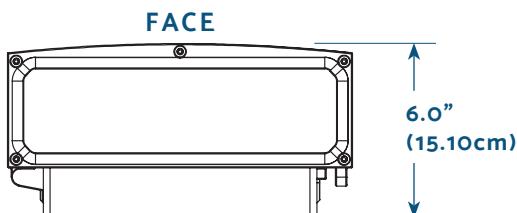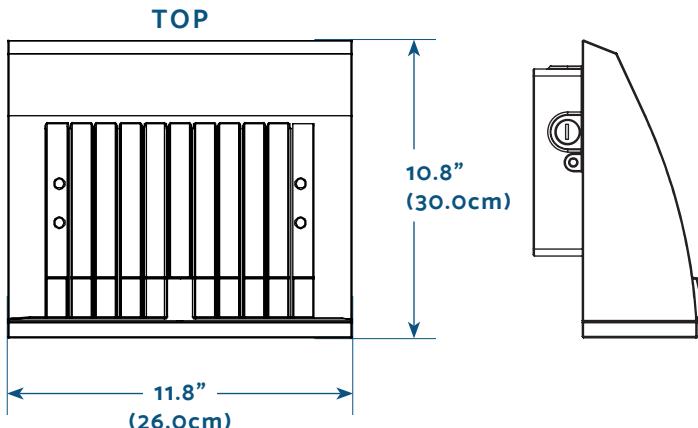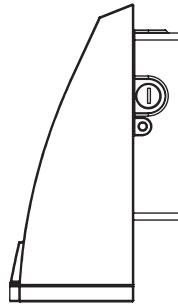

FAX 866-366-4029

WWW.EVERLASTLIGHT.COM

CALL 888-383-7578

© 2017 EVERLAST[®] LIGHTING, LLC. ALL RIGHTS RESERVED. PUBLISHED BY EVERLAST[®] LIGHTING, 2021 WELLWORTH AVENUE, JACKSON, MICHIGAN 49203. REPRODUCTION IN PART OR WHOLE OF THIS DOCUMENT IN ANY COMMERCIAL USE INCLUDING PUBLICATION, BROADCASTING, OR REDISTRIBUTION IN ANY MEDIUM WITHOUT THE PRIOR WRITTEN PERMISSION OF THE PUBLISHER IS PROHIBITED, 12-17