


Linear Series

LED High / Low Bay



The EverLast Linear LED high/low bay is a perfect aesthetic match for replacing archaic traditional T5, T8, and T12 fluorescent tube fixtures. With a 10-year limited warranty, the Linear Series LED fixture eliminates ballast and tube maintenance while vastly improving light quality.

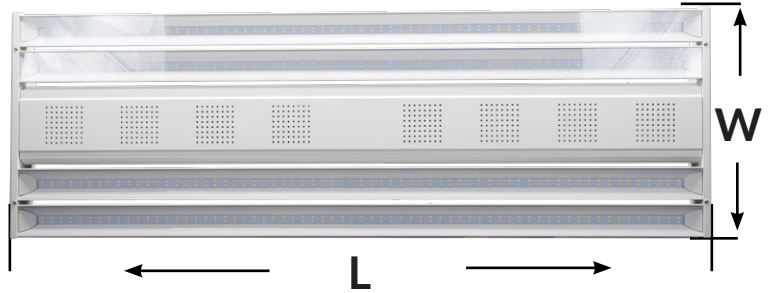

Backed by EverLast's 10 year limited warranty

SUMMARY

Lumens Delivered:	100W: 13,200 Lumens
Lumens Delivered:	150W: 21,200 Lumens
Lumens Delivered:	200W: 29,000 Lumens
Lumens Delivered:	300W: 43,500 Lumens
Adayo LED Driver	
Lumileds DS207 LED Chips	
1-10v Dimming	
UL1598	
IP40 Rated	
Temperature Rated: -22f to 122°f	
CRI 80	
Materials: Stamped aluminum housing with white powdercoat finish. Extruded aluminum heatsinks for improved thermal management.	
Mounting: 10' Adjustable Steel Cable Standard	

Unit	Width	Length	Weight
100w	9.8" 24.9 cm	43.1" 109.4 cm	12 lbs
150w	18.6" 47.3 cm	22.7" 57.7 cm	14.5 lbs
200w	14.1" 35.9 cm	43.1" 109.4 cm	16 lbs
300w	18.6" 47.3 cm	43.1" 48 cm	23.0 lbs

TOTAL CURRENT (amps) / FIXTURE

Wattage	120V AC	240V AC	277V AC	480V AC
100w	0.83	0.42	0.36	0.21
150w	1.25	0.63	0.54	0.31
200w	1.67	0.83	0.72	0.42
300w	2.50	1.25	1.08	0.63

FIXTURE


EL-LED-LHB-	100	L	40	X	D
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP	LENS	DIMMING
EL-LED-LHB-	100 150 200 300	120-277V AC 200-480V AC	40 4000K 50 5000K	X 120°	D 1-10V Dimming



AB100/AB150/AB200/AB300



Adjustable mounting bracket allows for angular positioning of the linear high bay for optimal light placement.

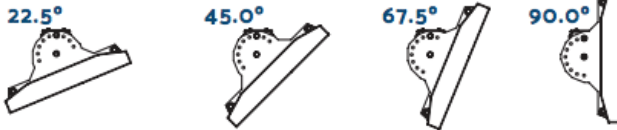

HBGRIP180



15' Adjustable steel cable mount.

OF / BL / DH



On-Off / Bi-level / Daylight harvesting sensor options.