

Titan Series

LED SHOE BOX



The Titan Series LED shoe box offers a powder coated die cast aluminum housing, dusk-to-dawn and control options, along with various mounting solutions. The Titan Series focuses on matching existing site lighting aesthetic with its traditional form factor, ease of installation, and energy reduction in an economically priced package making it ideal for quick turn-around projects.


Backed by EverLast's 10 year limited warranty

SUMMARY

LUMEN OUTPUT:
150W: 18,500* Lumens @5000k
200W: 24,200* Lumens @5000k
300W: 37,600* Lumens @5000k
Inventronics LED Driver Lumileds LED Chips
1-10v Dimming
10kV Surge Protector (Standard)
DLC Premium** UL1598
IP66 Rated
Temperature Rated: -22f to 122°f
Materials: Extruded Aluminum Housing with bronze powdercoat finish.

*Lumen output varies based upon kelvin ratings

**For current DLC and DLC Premium qualified versions available, please visit <https://www.designlights.org/search/>

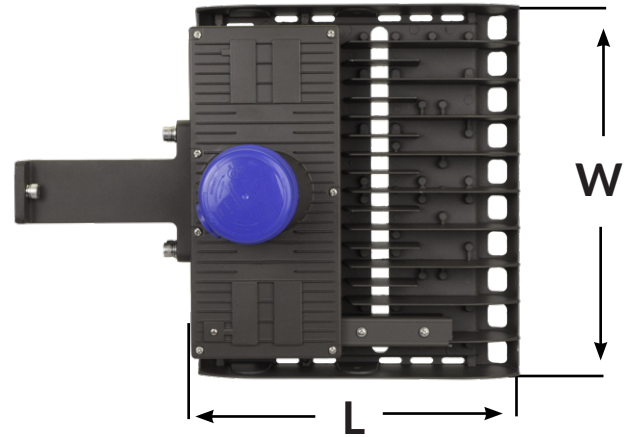

Unit	Width	Length	Weight
150w	12.6" 26 cm	11.0" 42 cm	17.2 lbs
200w	12.6" 26 cm	11.0" 42 cm	17.2 lbs
300w	10.2" 26 cm	18.2" 42 cm	21.8 lbs

TOTAL CURRENT (amps) / FIXTURE

Wattage	120V AC	240V AC	277V AC	480V AC
150w	1.25	0.63	0.54	0.31
200w	1.67	0.83	0.72	0.42
300w	2.50	1.25	1.08	0.63

ORDERING INFORMATION

BASE MODULE


EL-LED-TS12	150	L	40	IV
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP	DISTRIBUTION TYPE
EL-LED-TS12-	150 200 300	UL 120-277V AC UH 347-480V AC	3000K 4000K 5000K	TYPE III



TECHNICAL SPECS

Unit	BUG RATING	EPA RATING
150w	B4-U3-G4	0.50 ft ²
200w	B4-U3-G4	0.50 ft ²
300w	B4-U3-G4	0.86 ft ²

DISTRIBUTION TYPE III



TYPE III

TITAN SERIES LED SHOE BOX MOUNTING OPTIONS

MOUNTING OPTIONS

KSFT



Knuckle Slip Fitter.
Fits 2.5" pole diameter
180° of rotation.

SSPT



Straight Surface Pole.
Designed for easy installation
on a flat surface pole.

SRPT



Straight Round Pole.
Designed for easy installation
on a round surface pole.

FLMT



Adjustable U-Bracket.
Designed for use on flat surfaces
while still offering angled positioning..

TITAN SERIES LED SHOE BOX SENSOR OPTIONS

ACCESSORIES

PC



NEMA Photocell
Offers dusk to dawn automated controls for shoe box lights.

BLPC



Blank Photocell
**Required for operation of shoe box lights.

SP20



20kV Surge Protector
Offers protection against voltage spikes to reduce the chances of fixture damage.

MULTIPLE SENSOR OPTIONS



OF = On / Off sensor option
BL = Bi-Level sensor option
DH = Daylight Harvesting sensor option