


# Linear Series

## LED High / Low Bay



The EverLast Linear LED high/low bay is a perfect aesthetic match for replacing archaic traditional T5, T8, and T12 fluorescent tube fixtures. With a 10-year limited warranty, the Linear Series LED fixture eliminates ballast and tube maintenance while vastly improving light quality.

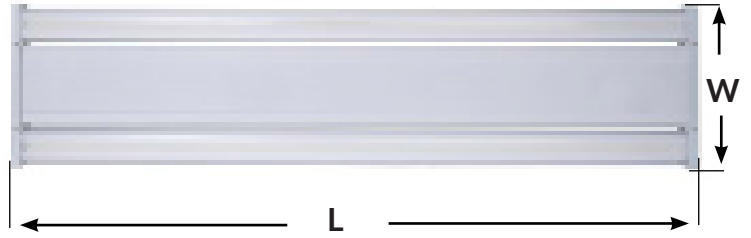

Backed by EverLast's 10 year limited warranty

### SUMMARY

75W: 10,900* Lumens @5000k
100W: 15,690* Lumens @5000k
150W: 22,500* Lumens @5000k
200W: 30,185* Lumens @5000k
240W: 35,900* Lumens @5000k
300W: 46,480* Lumens @5000k
400W: 60,540* Lumens @5000k
Sosen LED Driver
Cree 2835 LED Chips
Continuous Dimming 1-10v
DLC Premium
UL1598
IP44 Suitable for damp locations
Temperature Rated: -40f to 122°f
CRI 80
Materials: Stamped aluminum housing with white powdercoat finish. Extruded pure aluminum heat-sinks for optimal thermal management. Equipped with 24" 3 wire pigtail.
Mounting: 10' Adjustable Steel Cable Standard

\*Lumen output varies based upon kelvin ratings

Unit	Width	Length	Weight
75w	10.0" 254 mm	23.0" 577 mm	6.8 lbs
100w	10.0" 254 mm	23.0" 577 mm	6.8 lbs
150w	15.0" 374 mm	23.0" 577 mm	7.3 lbs
200w	10.0" 254 mm	43.0" 1094 mm	11.9 lbs
240w	10.0" 254 mm	43.0" 1094 mm	12.5 lbs
300w	15.0" 374 mm	43.0" 1094 mm	14.3 lbs
400w	15.0" 374 mm	43.0" 1094 mm	18.5 lbs

### TOTAL CURRENT (amps) / FIXTURE

Wattage	120V AC	240V AC	277V AC	480V AC
75w	0.62	0.31	0.27	
100w	0.83	0.42	0.36	0.21
150w	1.25	0.63	0.54	0.31
200w	1.67	0.83	0.72	0.42
240w	2.00	1.00	0.86	
300w	2.50	1.25	1.08	0.63
400w	3.33	1.66	1.44	

### FIXTURE

EL-LH15-	100	L	40	280	120	XX
FIXTURE	WATTAGE	VOLTAGE	COLOR TEMP	# LEDs	LENS	OPTION
EL-LH15-	75 100 150 200 240 300 400	L 120-277V AC UH 277-480V AC	40 4000K 50 5000K	220 = 75W 280 = 100W 440 = 150W 560 = 200W 680 = 240W 880 = 300W 1120 = 400W	120 = 120° 90 = 90° 50*90 = 50°x90°	MS = Motion Sensor SP = Surge Protection EM = Emerg. Driver



**EM10 / EM20**



10W Emergency Battery Backup  
20W Emergency Battery Backup

**HBGRIP180**



15' Adjustable steel cable

**OF / BL / DH**



On-Off / Bi-level / Daylight harvesting sensor options

**AB100/AB150/AB200  
AB240/AB300/AB400**



Adjustable surface mount bracket

**SP10**



10kV Surge Protector

<b>S9B</b> - 9' BLACK 120V STANDARD
<b>L59B</b> - 9' BLACK 120V TWIST LOCK
<b>L69B</b> - 9' BLACK 240V TWIST LOCK
<b>L79B</b> - 9' BLACK 277V TWIST LOCK
<b>L89B</b> - 9' BLACK 480V TWIST LOCK
<b>6FW</b> - 6' FLEXIBLE CONDUIT

<b>9BCNO</b> - 9' BLACK CORD / NO PLUG
<b>6MCLC</b> - 6' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V)
<b>9MCLC</b> - 9' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V)

PLUG END OPTIONS

