

ACE SERIES INDIRECT LED SPORTS LIGHT




The EverLast ACE Series LED Indirect Sports light has been designed to provide athletic facilities with a high powered, zero glare lighting option ideal for sports where athlete performance can be impacted by traditional lighting options. With multiple wattages, protective wireguards, and sensor options available the ACE can be configured to fit any sized athletic facility.

Backed by EverLast's 10 year limited warranty

SUMMARY

| |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Lumen Output: HL16 Configurations 400W: 64,000* Lumens @5000k 500W: 80,000* Lumens @5000k |
| Lumen Output: HL17B Configurations 2x200 400W: 68,000* Lumens @5000k 2x240 480W: 79,200* Lumens @5000k 3x200 600W: 102,000* Lumens @5000k 3x240 720W: 118,800* Lumens @5000k |
| Electronics: HL16 Configurations Driver: Meanwell HLG (120-277V Applications) Driver: Meanwell HVG (200-480V Applications) Emitter: Seoul Semiconductor |
| Electronics: HL17B Configurations Driver: Moons (120-277V AC) Continuous Dimming: 1-10V Driver: Meanwell HVG (277-480V AC) Continuous Dimming: 0-10V Emitter: Seoul Semiconductor LED Chips |
| Ingress Protection: IP65 Rated |
| Temperature Rating: -40°F / 122°F |
| Color Rendering Index: 80 CRI |
| DLC: Premium** |
| UL: 1598 |
| Mechanical Materials: HL16 Configurations Cold Forged Aluminum Heat Sink Extruded Aluminum Driver Housing |
| Mechanical Materials: HL17B Configurations Die Cast Aluminum Heat Sink Extruded Aluminum Driver Housing |
| Standard Accessories: 9' 3-Wire Power Cord 3-Point Suspension Cable 6' Safety Cable |

*Lumen output varies based upon kelvin ratings
 **For current DLC and DLC Premium-qualified versions available, please visit <https://www.designlights.org/search/>

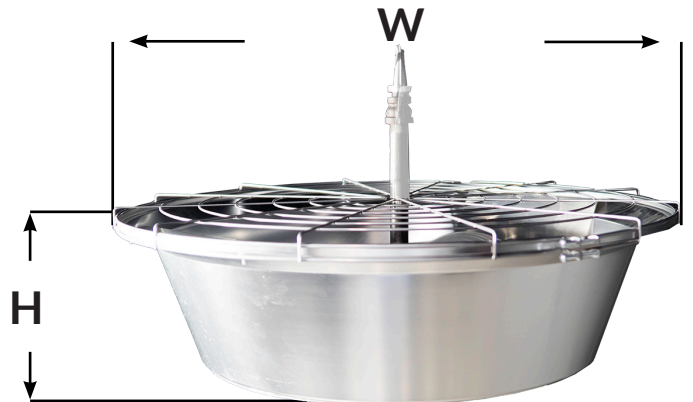

SHOWN WITH OPTIONAL ACCESSORIES

FIXTURE DIMENSIONS

| Wattage | Height | Width | Weight |
|----------------|----------------|-----------------|----------|
| 400w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 33.7 lbs |
| 500w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 33.7 lbs |
| 400w 2x200w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 27.0 lbs |
| 480w 2x240w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 27.0 lbs |
| 600w 3x200w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 35.0 lbs |
| 720w 3x240w | 8.7" (22.1 cm) | 30.2" (76.8 cm) | 35.0 lbs |

TOTAL CURRENT (amps) / FIXTURE

| Wattage | 120V AC | 240V AC | 277V AC | 480V AC |
|---------|---------|---------|---------|---------|
| 400w | 3.33 | 1.67 | 1.44 | 0.83 |
| 500w | 4.17 | 2.08 | 1.81 | 1.04 |
| 2x200w | 3.33 | 1.67 | 1.44 | 0.83 |
| 2x240w | 4.00 | 2.00 | 1.73 | 1.00 |
| 3x200w | 5.00 | 2.50 | 2.16 | 1.25 |
| 3x240w | 6.00 | 3.00 | 2.59 | 1.5 |

ORDERING INFORMATION

Choose from either a single module HL16-LG or the Multi-Module HL17B-LG options using the part number build chart below.

| BASE MODULE | EL-HL16-LG | 500 | L | 30 | X |
|-------------|------------|---------|----------------|----------------------|----------------------|
| | FIXTURE | WATTAGE | VOLTAGE | COLOR TEMP | BEAM ANGLE |
| EL-HL16-LG | | 400 | L 120-277V AC | 30 3000K | X 120° |
| | | 500 | UH 200-480V AC | 40 4000K 50 5000K | |
| EL-HL17B-LG | | 200 | L | 30 | D |
| | | FIXTURE | WATTAGE | VOLTAGE | |
| EL-HL17B-LG | | 200 | L 120-277V AC | 30 3000K | D CONTINUOUS DIMMING |
| | | | 127-431V DC | 40 4000K | |
| | | 240 | UH 277-480V AC | 50 5000K | |




ACE INDIRECT SPORTS LIGHT OPTIONAL ACCESSORIES

REFLECTOR

AL30INV

SINGLE MODULE CONFIGURATION



AL30INV400 (2x200)

MULTI-MODULE CONFIGURATION

- AL30INV400 (2x200)
- AL30INV480 (2x240)
- AL30INV600 (3x200)
- AL30INV720 (3x240)



CORDS


| |
|----------------------------------------|
| S9B - 9' BLACK 120V STANDARD |
| L59B - 9' BLACK 120V TWIST LOCK |
| L69B - 9' BLACK 240V TWIST LOCK |
| L79B - 9' BLACK 277V TWIST LOCK |
| L89B - 9' BLACK 480V TWIST LOCK |
| 6FW - 6' FLEXIBLE CONDUIT |

| |
|----------------------------------------------------------------------|
| 9BCDW - 9' BLACK CORD DIMMING WIRE (2 wire) |
| 6MCLC - 6' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V) |
| 9MCLC - 9' LUMINARY CABLE FLEXIBLE CONDUIT (5# POWER & 0-10V) |



MOUNTING

| |
|------------------------------------------------------|
| HK - HOOK MOUNT |
| EYE - EYE BOLT |
| FL75 - 3/4" FLANGE MOUNT |
| FL50 - 1/2" FLANGE MOUNT |
| 3SC - THREE POINT SUSPENSION CABLE (Included) |

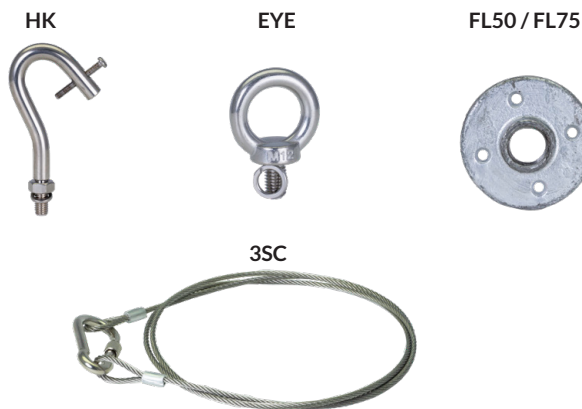

OTHER

| | |
|-------------------------------------|----------------------------------|
| JB - JUNCTION BOX | D - 1-10V DIMMING |
| SC6 - 6' SAFETY CABLE | OF - ON/OFF* |
| EM10 - 10W EMERGENCY BACKUP* | BL - BI-LEVEL* |
| EM20 - 20W EMERGENCY BACKUP* | DH - DAYLIGHT HARVESTING* |

**DON'T SEE THE OPTIONS YOU ARE LOOKING FOR?
CONTACT US TODAY!
888-383-7578**